

## S-Sight


This series simplifies surveillance with high-quality images and enhanced night vision capabilities. Powered by AI (DDA™ Video Analytics) and equipped with Check Point protection for comprehensive monitoring. Choose from rainbow cameras, Motorized Varifocal options, and Anti-Vandal designs for high-security areas.



# DI-380IPSN-MVF-G-V3

## 8MP MVF Lens Dome/Turret Camera with IR LED and DDA1 Analytics

Equipped with a 2.8-12mm motorized lens, this 8MP Dome/Turret camera is designed for medium-distance surveillance (up to 40m) in indoor and outdoor scenarios. This model complies with NDAA demands and ensures your device is cyber-protected round the clock with the integrated Check Point Quantum IoT Nano agent that provides an advanced threat prevention layer against the common attack vectors at runtime. With its excellent performance, reliability, and affordable price, the DI-380IPSN-MVF-G-V3 camera is the perfect solution for any basic installation.

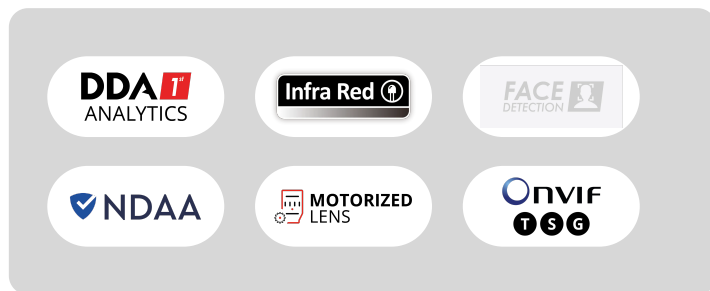

## MAIN FEATURES

- DI-380IPSN-MVF-G-V3 8MP MVF Lens Dome/Turret Camera with IR LED and DDA1 Analytics
- Sensor: 1/2.8" CMOS (16:9)
- Resolution: 3840×2160 25/30FPS (8MP)
- Lens: 2.8-12mm MVF with Auto Focus (102°- 32.1°)
- True Day&Night – ICR
- Illumination: 40m (3 High-Power IR LED)
- Compression: H.265 / H.264 / H.265+ / H.264+ / MJPEG (Substream only)
- Quantum IoT Nano agent by Check Point™
- General Analytics: Camera Tampering
- Human & Vehicle Recognition: Sterile Area, Line Crossing
- True WDR, BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 256GB)
- Built-in Microphone + Audio input
- ONVIF: Profile T/S/G
- Water Proof: IP67
- Weight: ~640g
- Power: DC12V/~900mA / PoE/~10W



<https://provision-isr.com>

## SPECIFICATIONS

| 3rd Party Cyber Protection |                                                                                                   |
|----------------------------|---------------------------------------------------------------------------------------------------|
| General                    | Quantum IoT Nano agent by Check Point™                                                            |
| Protection Methods         | Shell injection protection, File Monitor, Import-Table Protection, Dynamic-Memory Protection      |
| NDAA Compliant             |                                                                                                   |
| NDAA Compliant             | Yes                                                                                               |
| Video                      |                                                                                                   |
| Image Sensor               | 1/2.8" CMOS (16:9)                                                                                |
| Effective Pixels           | 3840x2160                                                                                         |
| Electronic Shutter         | 1s ~ 1/1000000s                                                                                   |
| Day & Night                | ICR                                                                                               |
| Min. Illumination          | 0.02 lux (@F1.6, AGC on) 0 lux with IR on                                                         |
| Audio                      |                                                                                                   |
| Audio compression          | G.711A/G.711U                                                                                     |
| Communication              | One-Way Audio                                                                                     |
| Image                      |                                                                                                   |
| Image Settings             | AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable |
| Image Enhancement          | True WDR, BLC, HLC, ROI                                                                           |
| Noise Reduction            | 3D-DNR                                                                                            |
| Image Orientation          | Mirror/Flip, Corridor Mode                                                                        |
| Privacy Zone               | Yes                                                                                               |
| Events and Analytics       |                                                                                                   |
| Analytics                  | General Analytics: Camera Tampering Human & Vehicle Recognition: Sterile Area, Line Crossing      |
| Motion Detection           | Yes                                                                                               |
| Compression                |                                                                                                   |

|                          |                                                                                                                                                                                  |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Resolution</b>        | 8MP / 6MP / 5MP / 4MP / 2MP / 1MP / D1 / QVGA / CIF                                                                                                                              |
| <b>Frame Rate</b>        | 8MP @ 1-20FPS, 6MP @ 1-25/30FPS, 5MP @ 1-25/30FPS, 4MP @ 1-25/30FPS, 2MP 1-25/30FPS                                                                                              |
| <b>Video Compression</b> | H.265 / H.264 / H.265+ / H.264+ / MJPEG (Substream only)                                                                                                                         |
| <b>Multi-Stream</b>      | Master Stream: 4K(3840x2160) (1~20fps) / 6MP(3072x2048) / 5MP(2592x1944) / 2K(2560x1440) / 2MP(1920x1080) Substream: 2MP/1MP/D1/CIF/QCIF Third Stream: 1MP/D1/CIF/QCIF (1~30fps) |
| <b>Bit Rate</b>          | 64Kbps ~ 8Mbps@H.265 / 64Kbps ~ 8Mbps@H.264                                                                                                                                      |
| <b>Encode Mode</b>       | VBR/CBR                                                                                                                                                                          |
| <b>Image Quality</b>     | Five levels under VBR; Free adjustment under CBR                                                                                                                                 |

| Lens                        |                                                                |
|-----------------------------|----------------------------------------------------------------|
| <b>Lens (Field of View)</b> | 2.8-12mm MVF with Auto Focus (102° - 32.1°)                    |
| <b>Iris</b>                 | DC Iris                                                        |
| <b>Lens Mount</b>           | Ø14 Mount                                                      |
| <b>Detect</b>               | 2.8~12mm(W): 85.71m(281.20ft) - 2.8~12mm(T): 272.75m(894.84ft) |
| <b>Recognize</b>            | 2.8~12mm(W): 17.14m(56.23ft) - 2.8~12mm(T): 54.55m(178.96ft)   |
| <b>Identify</b>             | 2.8~12mm(W): 8.57m(28.11ft) - 2.8~12mm(T): 27.27m(89.46ft)     |


| Network                  |                                                                                                                                                                           |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>User Access</b>       | Supports simultaneous monitoring of up to 10 users with multi-stream real-time transmission                                                                               |
| <b>Network Protocol</b>  | IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS, P2P                                                                         |
| <b>Remote Monitoring</b> | IE Browsing (Plug-In required), Chrome/Edge/Safari/Firefox plug-in free browsing, Ossia VMS Software, Provision Cam2 Mobile App *P2P WEB connetion always requires Plugin |
| <b>Ethernet</b>          | 100Mbps                                                                                                                                                                   |
| <b>ONVIF</b>             | Profile T/S/G                                                                                                                                                             |

| Connectivity              |                                   |
|---------------------------|-----------------------------------|
| <b>Network</b>            | RJ45 (+PoE)                       |
| <b>Audio Connectivity</b> | Built-in Microphone + Audio input |

|                     |                                                             |
|---------------------|-------------------------------------------------------------|
| Alarm               | No                                                          |
| SD Card             | Event/Schedule based Main/Substream recording (Up to 256GB) |
| Wiegand             | N/A                                                         |
| Power               | DC Socket                                                   |
| Analog Video Output | No                                                          |

|                   |                              |
|-------------------|------------------------------|
| Housing           |                              |
| PoE               | Yes                          |
| Illumination      | 40m (3 High-Power IR LED)    |
| Power Supply      | DC12V/~900mA / PoE/~10W      |
| Protection Rate   | Water Proof: IP67            |
| Work Environment  | -30°C~60°C, 10%~90% Humidity |
| Bracket           | 3-Axis Bracket               |
| Dimensions        | Ø113mm×99.6mm                |
| Weight (gross)    | ~640g                        |
| Hard Reset Button | Yes                          |

## DIMENSIONS

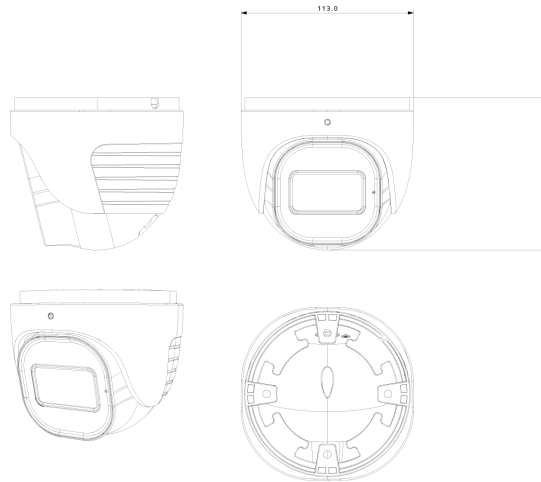

## ACCESSORIES

