

DC118

Poort/overheadcont., sabo.lus, 2m kabel, schakelafstand ca. 75 mm, NC

Industrial contact

The DC115/DC118 are designed to be installed in commercial and industrial environments where a rugged sealed unit is required. It is ideal for metal doors, overhad doors, fences and gates. Each model features a high strength extruded aluminium housing and is completely encapsulated in an exclusive polyurethane potting compound.

Comprehensive range

The range features wide gap distances and several models to meet any application need. Armoured cable is available.



Details

- Mounting brackets available for gates, garage doors, freezers
- Rugged construction for long life
- Convenient surface mounting
- 2 m armoured cable
- Tamper loop provided
- DC115 is polarity-sensitive with reference to magnet direction

DC118

Poort/overheadcont., sabo.lus, 2m kabel, schakelafstand ca. 75 mm, NC

Technische specificaties

General

Application type	Overhead
Contact type	NC
Connectivity	4 wires, 2 m

Wired/wireless


Wired-wireless	Wired
----------------	-------

Physical

Colour	Silver
Material	Anodised aluminium finish
Dimensions magnet	76 x 12 x 25 mm
Dimensions contact / sensor	76 x 12 x 25 mm
Operating gap	75 mm (max.)

Standards & regulation

EN50131 grade	Grade 2
---------------	---------

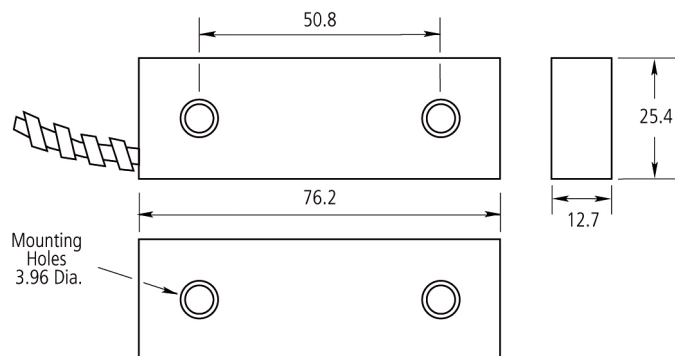

Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar nl.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

