


# HPSB series power supply unit



Buffer, switch mode power supply unit 13,8V DC

EN\*\*

CODE: HPSB 2512B v.1.0/VI  
TYPE: HPSB 13,8V/2A/7Ah Buffer, switch mode power supply unit

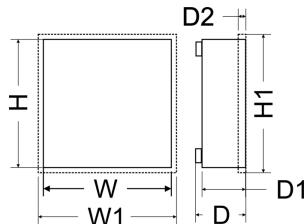

## Features:

- DC 13,8V/2A uninterruptible power supply\*
- fitting battery: 7Ah/12V
- wide range of mains supply: 176÷264V
- high efficiency 74%
- battery charging and maintenance control
- excessive discharging (UVP) protection
- battery charge current 0,5A
- battery output full protection against short-circuit and reverse polarity connection
- LED indication
- protections:
  - SCP short-circuit protection
  - OVP overvoltage protection
  - overvoltage protection (output AC)
  - against sabotage
  - overload protection (OLP)
- warranty – 2 year from the production date

## DESCRIPTION

A buffer PSU intended for uninterrupted supply to devices that require stabilised voltage of **12V DC (+/-15%)**. The PSU provides voltage of **U=13,8V DC** with output current of **I=2A + 0,5A for battery charging\***. In case of power decay, a battery back-up is activated immediately. The PSU is constructed based on the switch mode PSU, with high energy efficiency. The PSU is housed in a metal enclosure (colour RAL 9003) which can accommodate a 7Ah/12V battery. A micro switch indicates door opening (front cover).

During normal operation, the total current drawn by the equipment may not exceed **I = 2 A\***.

Maximum battery charging current: **0.5 A\***.

Total device current + battery: **2.5 A max\***.

\* Refer to chart 1

# HPSB series power supply unit



Buffer, switch mode power supply unit 13,8V DC

## SPECIFICATIONS

|  |  |
|--|--|
| PSU type   | A (EPS - External Power Source)  |
| Mains supply   | 176÷264V AC 50÷60Hz  |
| Current up to  | 0,45A@230VAC   |
| Supply power   | 35W max.   |
| Efficiency   | 74%  |
| Output voltage   | 13,8V DC – buffer operation<br>9,5V÷13,8V DC – battery-assisted operation  |
| <b>Output current <math>t_{AMB} &lt; 30^{\circ}C</math></b>          | <b>2A + 0,5A battery charge- refer to chart 1</b>  |
| <b>Output current <math>t_{AMB} = 40^{\circ}C</math></b>             | <b>1,4A + 0,5A battery charge - refer to chart 1</b>   |
| Voltage adjustment range   | 12÷14VDC   |
| Ripple   | 120mV p-p max.   |
| Battery charge current   | 0,5A max. @ 7Ah ( $\pm 5\%$ )  |
| Short-circuit protection SCP   | electronic, automatic return   |
| Overload protection OLP  | 105-150% of the PSU power, automatic return  |
| Battery circuit protection SCP and reverse polarity connection       | PTC polymer fuse   |
| Surge protection   | varistors  |
| Oversupply protection OVP  | >16V (automatic recovery)  |
| Excessive discharge protection UVP                                   | U<9,5 V ( $\pm 5\%$ ) – disconnect of connection battery   |
| Sabotage protection:<br>- TAMPER output indicating enclosure opening | - microswitch, NC contacts (enclosure closed),<br>0,5A@50V DC (max.)   |
| LED indication   | Yes  |
| Operating conditions   | 2nd environmental class, $-10^{\circ}C \div 40^{\circ}C$   |
| Enclosure  | Steel plate DC01, thickness: 0,7mm, colour: RAL 9003   |
| Enclosure dimensions   | 250 x 250 x 80+8 [mm] (WxHxD)  |
| Net/gross weight   | 1,7 / 1,9 kg   |
| Fitting battery  | 7Ah/12V (SLA) max.<br>160x90x75mm (WxHxD) max  |
| Closing  | Cheese head screw x 2 (at the front), (lock assembly possible)   |
| Declarations, warranty   | CE, RoHS, 2 year from the production date  |
| Notes  | The enclosure does not adjoin the assembly surface so that cables can be led.<br>Convectional cooling.<br>Connectors:Power-supply: $\Phi 0,63 \div 2,5$<br>Battery output BAT: 6,3F-2,5. |

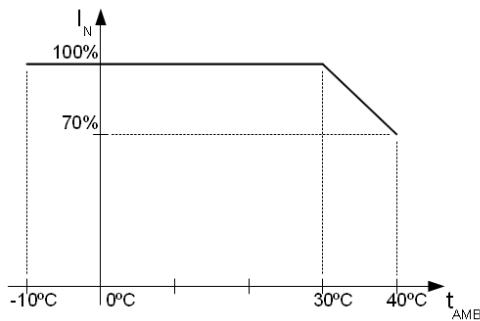


CHART 1. Acceptable output current from the PSU depending on ambient temperature.

# HPSB series power supply unit




Buffer, switch mode power supply unit 13,8V DC

## Optional configurations:


Buffer power supply unit HPSB 13,8V/2x1A/7Ah.

- HPSB2512B + LB2 2x1A (AWZ585, AWZ586) + 7Ah

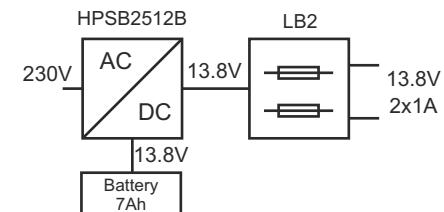


Buffer power supply unit HPSB 13,8V/4x0,5A/7Ah.

- HPSB2512B + LB4 4x0,5A (AWZ574, AWZ576) + 7Ah

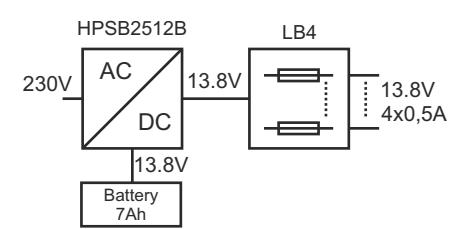


Buffer power supply unit HPSB 13,8V/12V/2A/7Ah.

- HPSB2512B + RN250 (13,8V/12V) + 7Ah

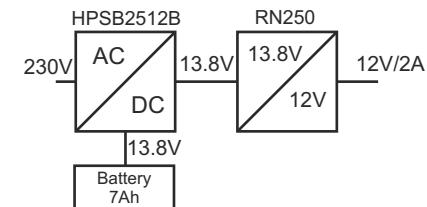


Buffer power supply unit HPSB 13,8V/12V/2x1A/7Ah.

- HPSB2512B + RN250 (13,8V/12V) + LB2 2x1A (AWZ585, AWZ586) + 7Ah

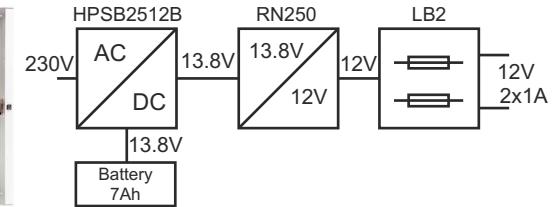

Buffer power supply unit HPSB 13,8V/12V/4x0,5A/7Ah.

- HPSB2512B + RN250 (13,8V/12V) + LB4 4x0,5A (AWZ574, AWZ576) + 7Ah

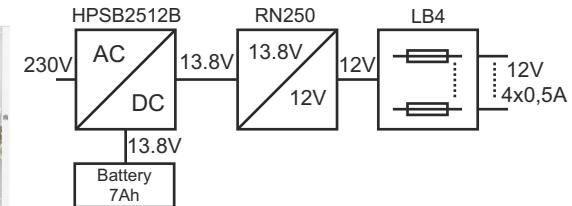

Buffer power supply unit HPSB 13,8V/2x5V÷7,4V/2x2A/7Ah.

- HPSB2512B + DCDC20 x 2 pcs (2x5V÷7,4V/2x2A) + 7Ah

