

MINI-SA2


Standalone EM Proximity Reader



Features

⇒ Input Voltage:	12-24V DC; 15-24V AC;
⇒ Current consumption:	60 mA at 12VDC; 40 mA at 24VDC
⇒ Output:	1 relay (0.5A/125VAC; 1A/30VDC) Latch or Pulse mode (01 to 250 seconds)
⇒ Read Range:	up to 8cm
⇒ Users:	4000
⇒ Exit Button Input:	Yes
⇒ Programming cards:	1 Master Card and 1 Delete Card
⇒ Visible LED Signal:	3 LEDs
⇒ Audible Signal:	One internal Buzzer
⇒ Operating Temperature:	-20°C to 50°C
⇒ Protection Standard:	Ip66
⇒ Resin potted electronics:	Yes
⇒ Dipswitch:	For enrollment of Master and Delete Card
⇒ Tamper switch:	For higher security
⇒ Dimension (mm):	90L x 51W x 17H

Accessories

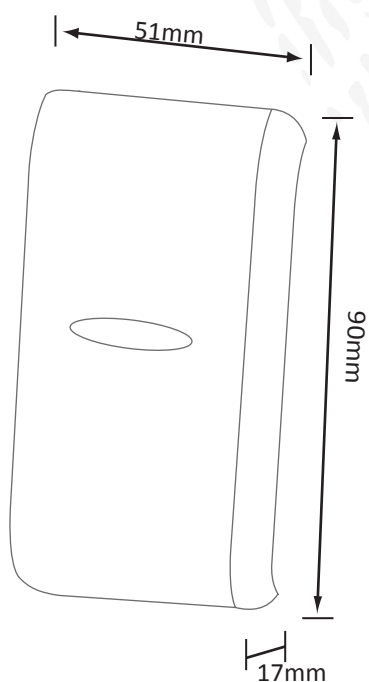

PBX-1C



PBX-1E



PBX-2



MINI SA2_DS_EN_V1