



## Double Push Panic Button


*Code: PADP3/SS/BK*

Panic Button | Double Push | Grade 3 | Stainless Steel / Black | Key Resettable

CQR manufacture two ranges of Double Push Panic Buttons, providing a discreet method of raising the notification of a potential threat, with the reduced possibility of false activation due to having two buttons for activation. The Grade 3 version of our Double Push Panic buttons are fitted with a selection of end of line resistors and cover / optional removal from mounting tamper. Available in white and stainless steel finishes, with key reset.

### Features & Benefits

- Latching / non-latching
- Selectable for Normally Open / Normally Closed
- Indicator to show activation
- Microswitch Alarm and Tamper
- Selectable End of Line Resistors
- Key Resettable
- Spare keys available

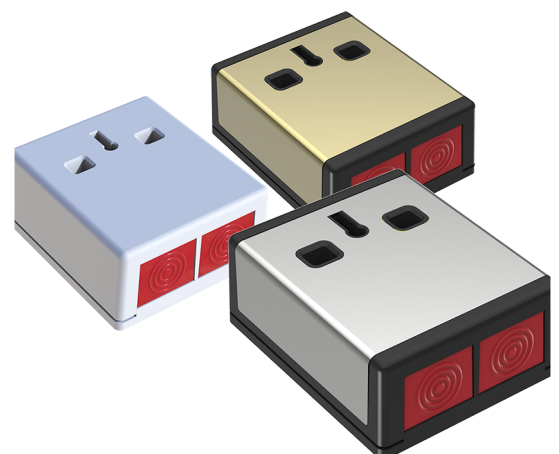

## Security

EN50131-1 Grade	3
Tamper Protection	Cover & RFMS

## Environmental

EN50130-5 Class	II
IP Rating	4X
Temperature Range	-10° C to +40° C

## Housing

Colour	Stainless Steel / Black
Material	ABS
Dimensions (mm)	62 x 75 x 30

## Electrical

Connection Type	Terminals
Switch Rating	12v DC 3A

## Features

Visual Indication	Yes
Features Selected by	Jumper
Reset Method	Key
Confirmed Output	No
Operation Mode	Push
Timed	No
Mounting Method	Surface
Built-in Resistor Types	A, B, D, E, I
Connection Type	Terminals
No. Terminals	4

## Mechanical

Mounting Method	Surface
Colour	Stainless Steel / Black

