

DH-IPC-HDW3849H-ZAS-PV-PRO-Black

8MP WizColor TiOC PRO Vari-focal Eyeball WizSense Network Camera



Launched by Dahua Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Dahua's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

Series Overview

Dahua WizSense 3 Series Network Camera greatly saves on bandwidth and storage space through its AI Coding technology. Driven by its advanced deep learning algorithms, the camera supports intelligent functions such as perimeter protection, smart motion detection (SMD), Acupick, and AI SSA (AI Scene Self-adaptation), making it easy and convenient to use. Starlight technology and its large aperture lens also allow the camera to produce clear, vivid images even in poor lighting conditions.

Functions

Xinghan Large-Scale AI Models-Vision

Xinghan Large-Scale AI Models-Vision seamlessly expands the storage and operational capacity of algorithmic models through the powerful integration of edge AI model algorithms and NPU computing power. Engineered with a lightweight transformer architecture and enhanced by model distillation and quantization techniques, it optimizes the computing power consumption of ViT operators. This enables the system to collaborate on multiple tasks simultaneously through joint inference between small and large models optimized for edge devices.

WizColor Technology

Dahua WizColor Technology seamlessly combines with the powerful AI-ISP, large pixel size sensor and large aperture in cameras. This unique integration enables cameras to effortlessly capture high-quality images with vibrant colors during nighttime scenarios, ensuring fine details are preserved and minimizing motion blur. Unlike traditional self-illuminating cameras, Dahua WizColor Technology maximizes the utilization of weak light sources, such as moonlight and city lights reflected in the sky, delivering captivating full-color images of the entire scene. It also ensures that monitoring distances are not compromised at night due to limited illumination ranges, facilitating full-color image capture even over long distances.

Siren and Light Active Deterrence

Dahua siren and light active deterrence network camera supports the light alarm and voice alarm when perimeter event occurs, to realize the deterrence and effective intervention. The camera is built in multiple voices for selection, and supports customized voice importing.

- 8-MP 1/1.8" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 8 MP (3840 × 2160)@25/30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in multi-core light, the max. IR distance is 50 m and the max. warm light distance is 50 m.
- ROI, SMART H.264+/H.265+, AI H.264/H.265, flexible coding, applicable to various bandwidth and storage environments.
- Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- Intelligent monitoring: Intrusion, tripwire (the two function support the classification and accurate detection of vehicle and human), stay detection, loitering detection, face detection (full image).
- Abnormality detection: Motion detection, privacy masking, scene changing, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection.
- Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 512 G Micro SD card; built-in dual Mic; 1-ch speaker; support two-way talk.
- 12 VDC/PoE power supply.
- IP67 protection.
- Sound and light alarm (red and blue lights).
- SMD 4.0.
- Supports AI SSA and one-tap arming and disarming.
- SMD area can be set in warm light areas that support triggering alarms.



SMD 4.0

Dahua Smart Motion Detection technology works with intelligent algorithms to classify targets that trigger motion detection alarms. It filters out objects that are not targets, such as small and large animals, to avoid triggering false alarms. With an AI NVR, Quick Pick technology becomes available, allowing you to easily search for and pick out human and vehicle targets from SMD event videos, prioritizing the highest matches.

AI-ISP

With AI ISP technology, the camera is able to easily adapt to scenes, producing high quality images that reveal the fine details of targets.

Protection (IP67, Wide Voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normally after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows ±30% (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification						AI SSA		Adopt deep learning algorithms to adjust the parameters of the image to suit the conditions.		
Camera						Smart Search		Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos		
Image Sensor						Video				
Max. Resolution						Video Compression		H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)		
ROM						AI Coding		AI H.265; AI H.264 *Includes smart codec technology, Smart H.265+ and Smart H.264+		
RAM						Video Frame Rate		Main stream: 3840 × 2160@(1 fps–25/30 fps) Sub stream: 1920 × 1080@(1 fps–25/30 fps) Third stream: 1920 × 1080@(1 fps–25/30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.		
Scanning System						Stream Capability		3 streams		
Electronic Shutter Speed						Resolution		8M (3840 × 2160); 6M (3200 × 1800); 5M (3072 × 1728); 4M (2688 × 1520/2560 × 1440); 3M (2304 × 1296); 1080p (1920 × 1080); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)		
Min. Illumination						Bit Rate Control		CBR/VBR/ABR		
S/N Ratio						Video Bit Rate		H.264: 3 kbps–16384 kbps; H.265: 3 kbps–16384 kbps		
Illumination Distance						Day/Night		Auto(ICR)/Color/B/W		
Illuminator On/Off Control						BLC		Yes		
Illuminator Number						HLC		Yes		
Angle Adjustment						WDR		120 dB		
Lens						Scene Self-adaptation (SSA)		Yes		
Lens Type						White Balance		Auto; natural; street lamp; outdoor; manual; regional custom		
Lens Mount						Gain Control		Auto		
Focal Length						Noise Reduction		3D NR		
Max. Aperture						Motion Detection		OFF/ON (4 areas, rectangular)		
Field of View						Region of Interest (RoI)		Yes (4 areas)		
Iris Control						Image Stabilization		Electronic Image Stabilization (EIS)		
Close Focus Distance						Smart Illumination		Yes		
DORI Distance	Lens		Detect	Observe	Recognize	Identify	Smart Dual Light		Yes	
	W		87.6 m (287.40 ft)	35.0 m (114.83 ft)	17.5 m (57.41 ft)	8.8 m (28.87 ft)	Defog		Yes	
	T		186.6 m (612.20 ft)	74.6 m (244.75 ft)	37.3 m (122.38 ft)	18.7 m (61.36ft)	Image Rotation		0°/90°/180°/270° (Support 90°/270° with 2688 × 1520 resolution and lower)	
*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.						Mirror		Yes		
Intelligence						Privacy Masking		8 areas		
IVS (Perimeter Protection)						Audio				
Face Detection(Full Image)						Built-in MIC		Yes, built-in dual Mic		
SMD						Built-in Speaker		Yes, built-in speaker Max power consumption: 2 W; max sound level at 10 cm: 110 dB * Test results from laboratory		
AcuPick						Audio Compression		PCM; G.711a; G.711Mu; G.726; G.723		

Alarm

Alarm Event	No SD card; SD card full; SD card error; network disconnection; IP conflict; illegal access; motion detection; video tampering; tripwire; intrusion; stay detection; loitering detection; face detection (full image); scene changing; audio detection; voltage detection; defocus detection; SMD; security exception
-------------	---

Network

Network Port	RJ-45 (10/100/1000 Base-T)
SDK and API	Yes
Network Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; SNMP; P2P; Bonjour; Auto Registration
Interoperability	ONVIF (Profile S & Profile G & Profile T & Profile M); CGI
User/Host	20 (Total bandwidth: 64 M)
Storage	FTP;SFTP; Micro SD card (support max. 512 GB); NAS
Browser	IE: IE11 Chrome Firefox
Management Software	Smart PSS Lite; DSS; DMSS; DoLynk Care
Mobile Client	iOS;Android
Security	Digest; WSSE; Account lockout; Security logs; IP/MAC filtering; Generation and importing of X.509 certification; Syslog; HTTPS; 802.1x; Trusted boot; Trusted execution; Trusted upgrade

Certification

Certifications	CE-LVD: EN 62368-1; CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU
----------------	---

Port

Audio Input	1 channel (RCA port)
Audio Output	1 channel (RCA port)
Alarm Input	1 channel in: wet contact, 5 mA 3–5 VDC
Alarm Output	1 channel out: dry contact, 1,000 mA 30 VDC/500 mA 50 VAC

Power

Power Supply	12 VDC/PoE+ (802.3at)
Dual Power Backup	When the power adapter and PoE provide power at the same time, disconnect one of them. The device will continue to work, but will not restart.
Power Consumption	Basic: 4.1 W (12 VDC); 5.3 W (PoE) Max. (H.265 + WDR+ warm light + siren and light active deterrence + intelligence on): 11.3 W (12 VDC); 13.8 W (PoE)

Environment

Operating Temperature	–30 °C to +60 °C (–22 °F to +140 °F)
Operating Humidity	≤95%
Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Storage Humidity	≤95% (RH), non-condensing
Protection	IP67

Structure

Casing Material	Metal
Product Dimensions	127.6 mm × Ø122.0 mm (5.02" × Ø4.80")
Net Weight	0.94 kg (2.07 lb)
Gross Weight	1.17 kg (2.58 lb)

Ordering Information

Type	Model	Description
8MP Camera	DH-IPC-HDW3849H-ZAS-PV-PRO-Black	8MP WizColor TiOC PRO Vari-focal Eyeball WizSense Network Camera
	PFA137-B	Junction Box
	PFB2203W-B	Wall Mount Bracket
	PFA109-B	Mount Adapter
	PFB220C-B	Ceiling Mount Bracket
	PFA152-E-B	Pole Mount Bracket
	PFM320D-EN	DC12V2A Power Adapter
	PFM900-E	Integrated Mount Tester
	TF-P100	MicroSD Memory Card

Accessories

Optional:


 PFA137-B
Junction Box

 PFB2203W-B
Wall Mount Bracket

 PFA109-B
Mount Adapter


 PFB220C-B
Ceiling Mount Bracket

 PFA152-E-B
Pole Mount Bracket

 PFM320D-EN
12 VDC 2A Power Adapter

 PFM900-E
Integrated
Mount Tester

 TF-P100
Integrated
Mount Tester

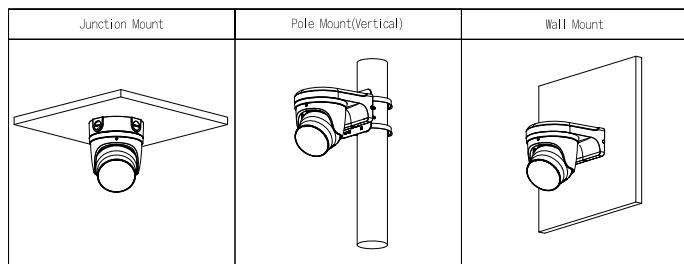

Dimensions (mm[inch])

